


THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED.

Diagram illustrating the 160 Position DIN Connector VPC P/N 270008 in Mating View. The connector is shown with its 160 pins arranged in two columns of 80 pins each. The top pin is labeled PIN 32 A and the bottom pin is labeled PIN 1 E.

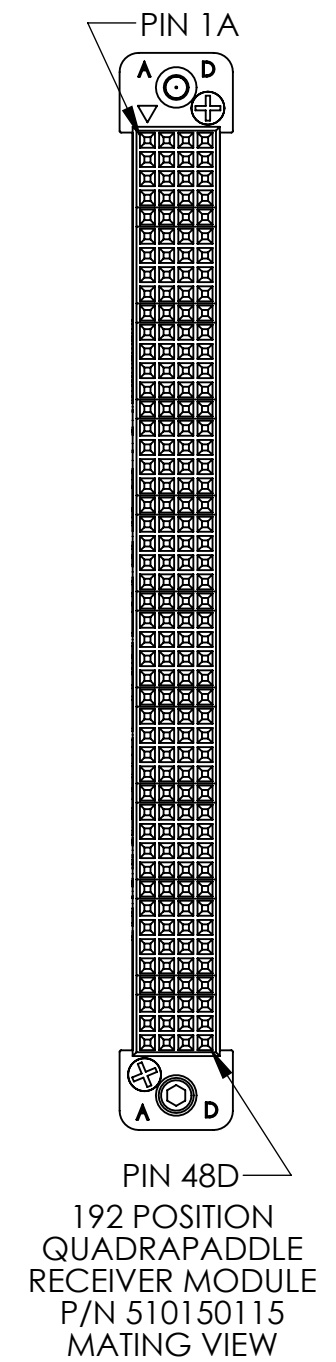

SOLIDWORKS DRAWING FILE	TORQUE ALL SCREWS PER ES2 UNLESS OTHERWISE SPECIFIED.		VIRGINIA PANEL CORPORATION CBA RCV C2 SPEC FOR WATERS CORP.			
	DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.					
	TOLERANCES UNLESS SPECIFIED					
	NOMINAL LENGTH	TOLERANCE				
	0 - 11.99"	+1.00/-0.00				
	12.00 - 59.99"	+2.00/-0.00				
	60.00 - 119.99"	+4.00/-0.00				
120.00 - 299.99"	+6.00/-0.00					
300.00" & UP	+5%/-0.00					
	SIZE	CAGE CODE	DWG. NO.	REV		
	C	18117	541123210	C		
SCALE: NONE		541123210	5/6/09	SHEET 1 OF 2		

4							3							2							1						