

4

3

2

1





DO NOT SCALE DRAWING

THE INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF VIRGINIA PANEL CORPORATION AND IS SUBMITTED FOR USE BY THE CUSTOMER ONLY. THE DATA SHALL NOT BE DUPLICATED, USED, OR DISCLOSED IN WHOLE OR IN PART FOR ANY PURPOSE OTHER THAN TO MAINTAIN THE EQUIPMENT PROVIDED. CONSULT WITH VIRGINIA PANEL CORPORATION ENGINEERING IF MORE DETAIL IS REQUIRED.

REVISIONS

REV	DESCRIPTION	DATE	ENGR
E	ECN #09-510-0016	3/10/09	EMH

2-56 SCREWS PROVIDED
FOR PCB MOUNTING.
MAXIMUM TORQUE OF
2 IN-LBS [.225 N-m].

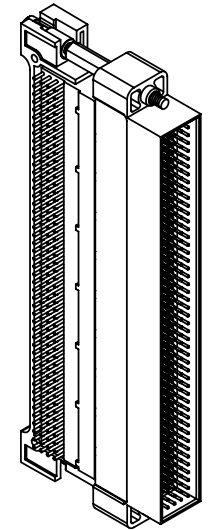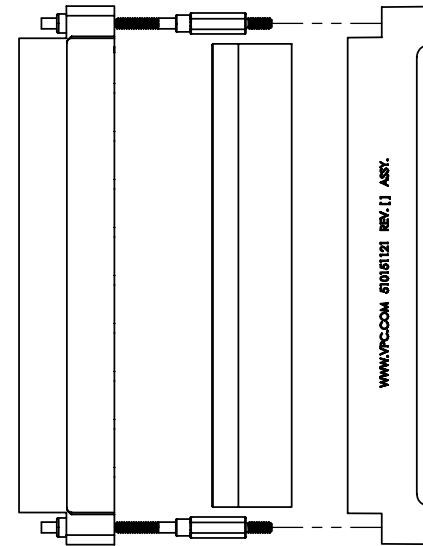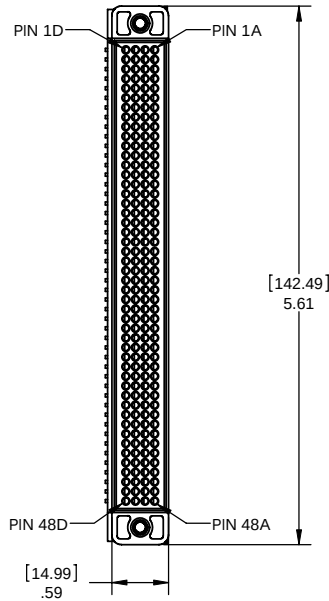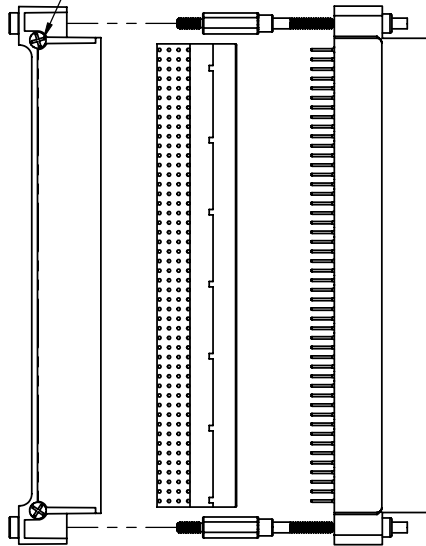

- 4 SEE PAGE 2 FOR NOTES 5-8
3 ALL NECESSARY HARDWARE FOR ASSEMBLY SUPPLIED IN KIT
2 MATERIALS:
HARDWARE: STAINLESS STEEL SCREWS
BRASS ALLOY STANDOFFS Ni PLATED
SHROUD: PEI
HEADER - INSULATOR: GLASS FILLED PET BLACK THERMOPLASTIC
CONTACT: PHOSPHOR BRONZE ALLOY
CONTACT PLATING IN MATING AREA: .00003 in. Au OVER .00005 in. Ni
1 FOR APPLICATION USE AND CARE INFORMATION CONSULT VPC USERS GUIDE @ WWW.VPC.COM

NOTES:

CUSTOMER DRAWING

VIRGINIA PANEL CORPORATION

WWW.VPC.COM

SIGNAL MODULE, ITA, 192 POSITION QUADRAPADDLE

with RIGHT ANGLE CONTACTS for CUSTOM PCB MOUNTING

DIMENSIONS ARE SHOWN AS:	SIZE	CAGE CODE	DWG. NO.	REV
[MILLIMETERS]	C	18117	510151121	E
INCHES	SCALE: NONE	510151121	6/6/06	SHEET 1 OF 2

4

3

2

1

