


BATTERY INSTALLATION INSTRUCTIONS

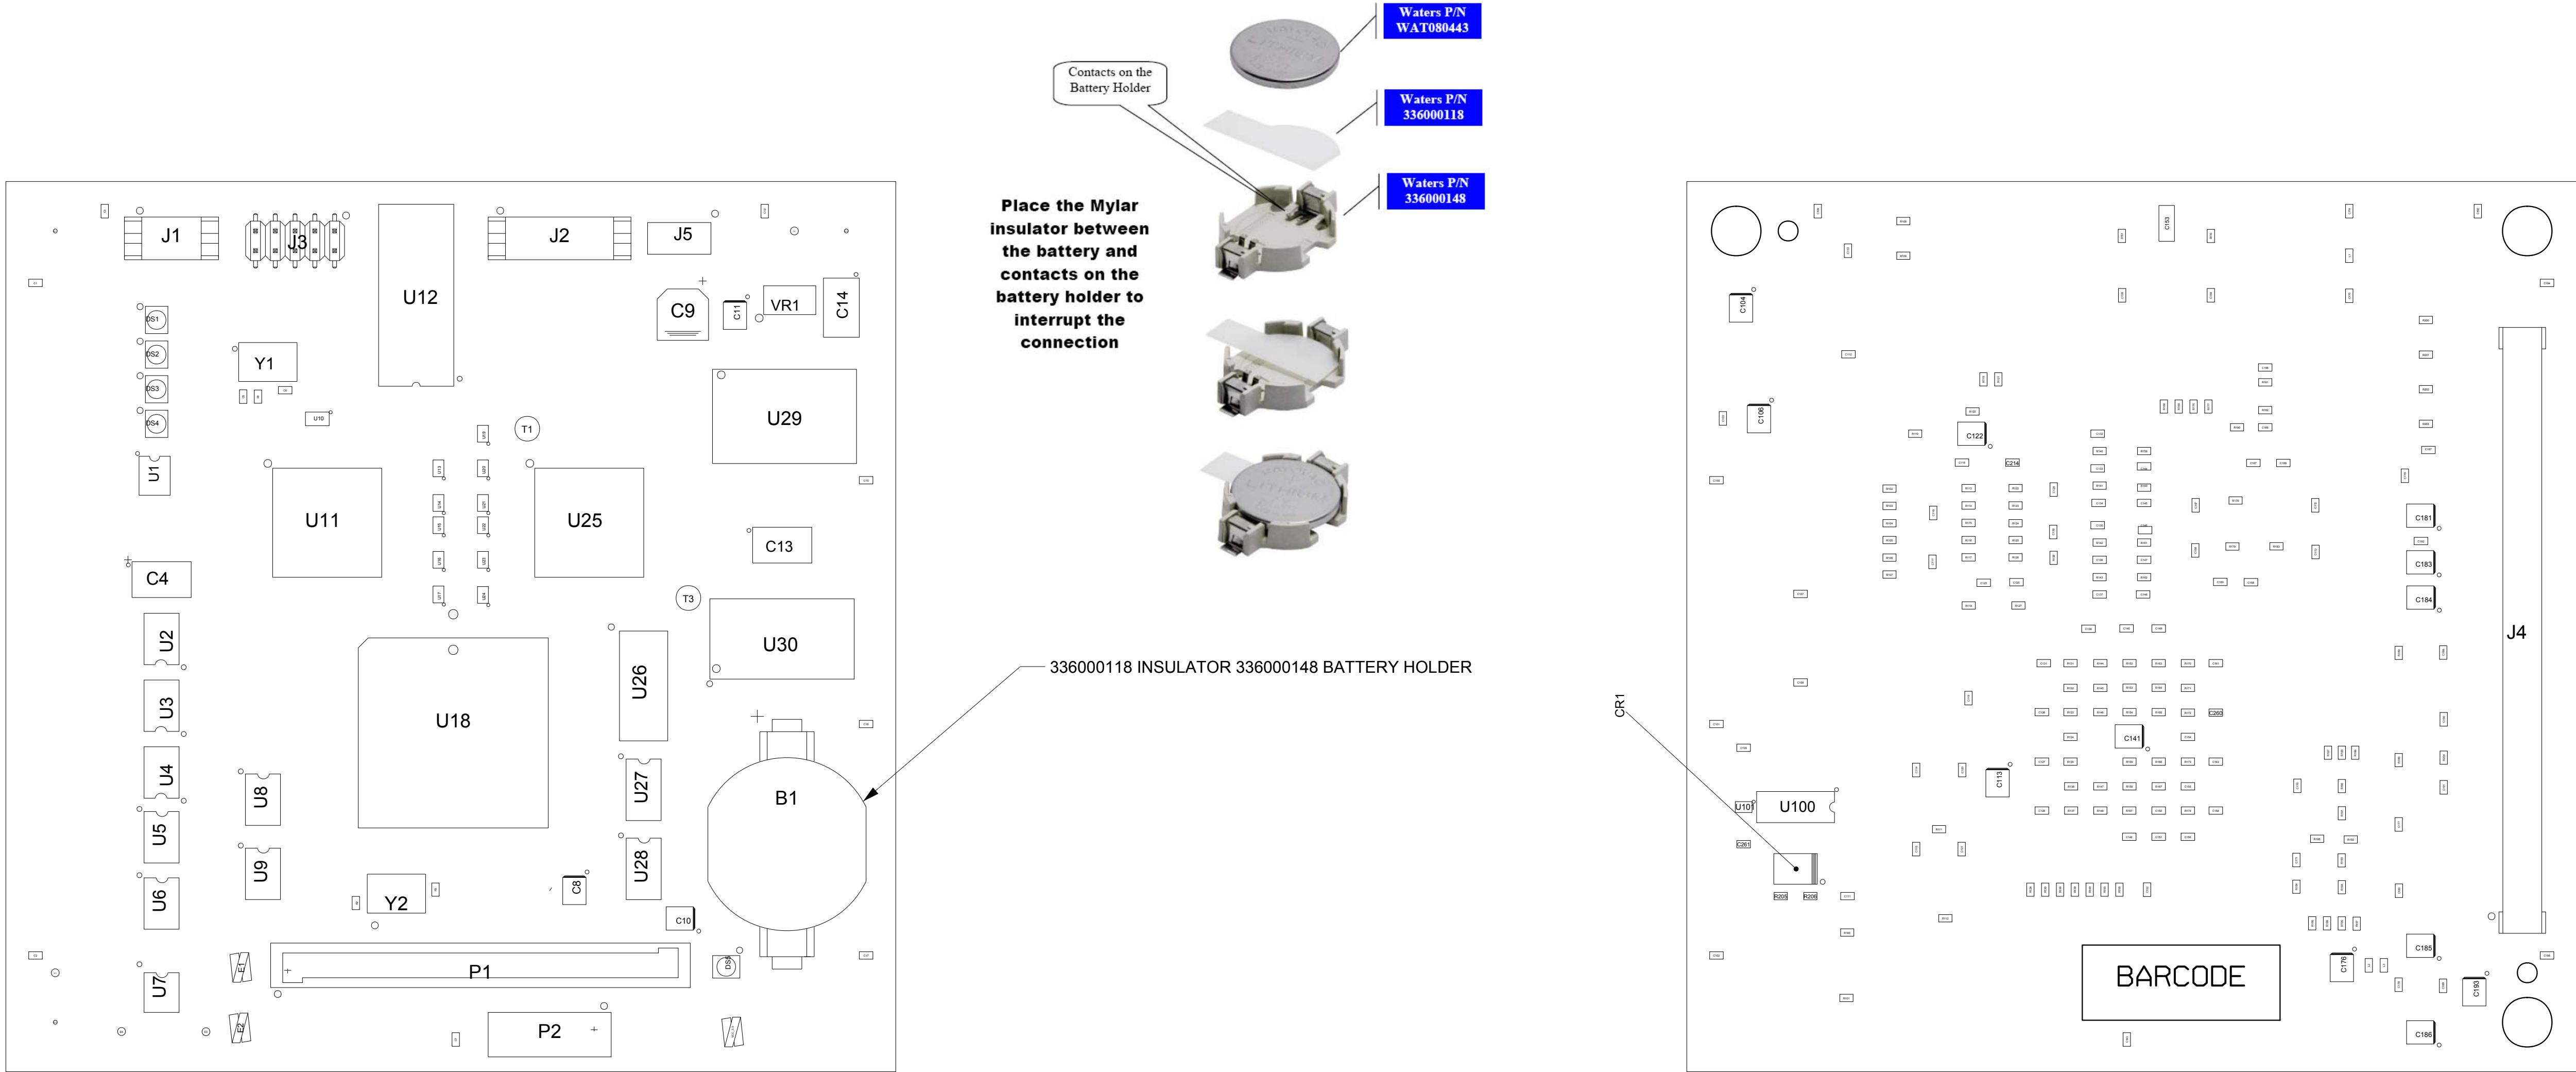

VIEWED FROM PRIMARY SIDE

NOTES:

- 1.0 THIS ASSEMBLY BUILT USING:
PCB 510000273 REV G
SCHEMATIC 710000273 REV F
- 2.0 RoHS:
2.1 PCB MUST COMPLY WITH WATERS RoHS REQUIREMENTS DOCUMENT 735001207.
2.2 VENDOR TO MARK ASSEMBLY AS RoHS COMPLIANT.
- 3.0 THE FOLLOWING IS A LIST OF THE REFERENCE DESIGNATORS OF THE UNSTUFFED PARTS:

C100,C101,C102,C109,C12,C139,C143,C150,C152,C153,C155,C159,C16,C17,C192,C194,
C195,C2,C3,C7,DS5,P1,P2,R100,R101,R112,R114,R115,R116,R127,R134,R151,
R176

VIEWED FROM SECONDARY SIDE

THE BILL OF MATERIALS FOR THIS ASSEMBLY IS CONTAINED IN A SEPARATE DOCUMENT WITH THIS DRAWING NUMBER.

UNLESS OTHERWISE SPECIFIED All dimensions are in inches. Remove all burrs and break sharp edges. Tolerances: Decimals .XX = ± .01 .XXX = ± .005 Angles = ± 0°30' SURFACE ROUGHNESS R3✓ DO NOT SCALE PRINT	DESIGN G. FRAGOZA	DATE 09/24/09	Waters 34 Maple St. Milford MA 01757 USA		
	DRAWN B. ALEXANDER	DATE 09/24/09			
	CHECKED	DATE	ASSY, PCB 3V CPU2000 1M X 16 FLASH ROHS		
	ENGR	DATE			
	ENGR	DATE			
	APPROVED	DATE			
SCALE 1 : 1			MENTOR EXPEDITION	SHEET 1 OF 1	